


PIGTAIL CONNECTOR SC / FPT- SCXX-01

Fiber optic pig tails, are desinged for ODF interconnections with high speed equipments in Single Mode, Multimode OM2, OM3, OM4 and so on, to meet demands in speeds of 1, 10 and 40 Gigabit transmissions for a optimized network.


The have them in a standard length of 1.5 meters but we are capable of making it in any size.




The SC - Subscriber Connector, Square Connector, Standard Connector is a direct fit Push Pull type, for Datacom applications and GPON telecommunications; EPON; GBIC.

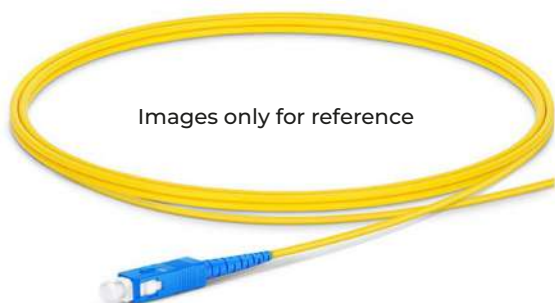

Images only for reference

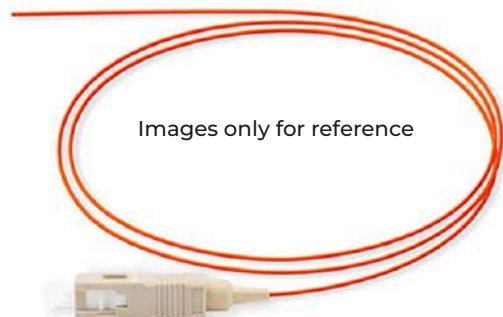

Images only for reference

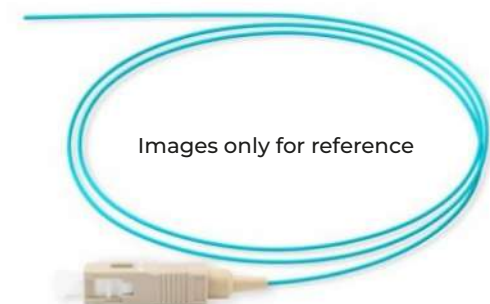

Images only for reference



Images only for reference

FPT-SCSM-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥50dB
Connector Type:	Single Mode 9/125
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C

FPT-SCMM-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 50/125 OM2
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C

FPT-SCM3-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 50/125 OM3
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C

FPT-SCM4-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 50/125 OM4
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C