

PIGTAIL CONNECTOR LC / FPT- LCXX-01

Fiber optic pig tails, are desinged for ODF interconnections with high speed equipments in Single Mode, Multimode OM2, OM3, OM4 and so on, to meet demands in speeds of 1, 10 and 40 Gigabit transmissions for a optimized network.

The have them in a standard length of 1.5 meters but we are capable of making it in any size.




The LC Connector - Lucent Connector - Little Connector or Local Connector has a small size for high density applications SFP, SFP+ transceivers and XFP transceivers



Images only for reference

FPT-LCSM-01


Connector A:	LC/UPC: IL≤0.25dB, RL≥50dB
Connector Type:	Single Mode 9/125
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C

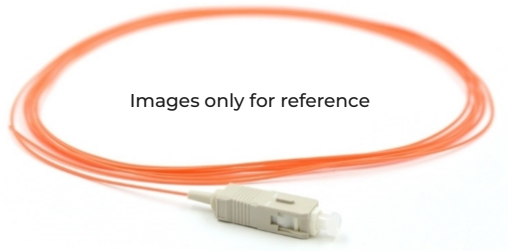

Images only for reference

FPT-LCMM-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 62.5 Microns OM1
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C

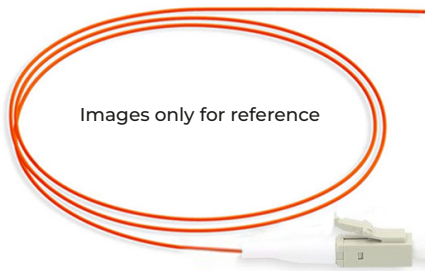

Images only for reference

FPT-LCM5-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 50 Microns OM2
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C



Images only for reference

FPT-LCM3-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 50/125 OM3
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C



Images only for reference

FPT-LCM4-01

Connector A:	LC/UPC: IL≤0.25dB, RL≥35dB
Connector Type:	Multimode 50/125 OM4
Operating Temperature:	20°C to 70°C
Storage Temperature:	40°C to 70°C